


SDP 螺紋網管

產品圖

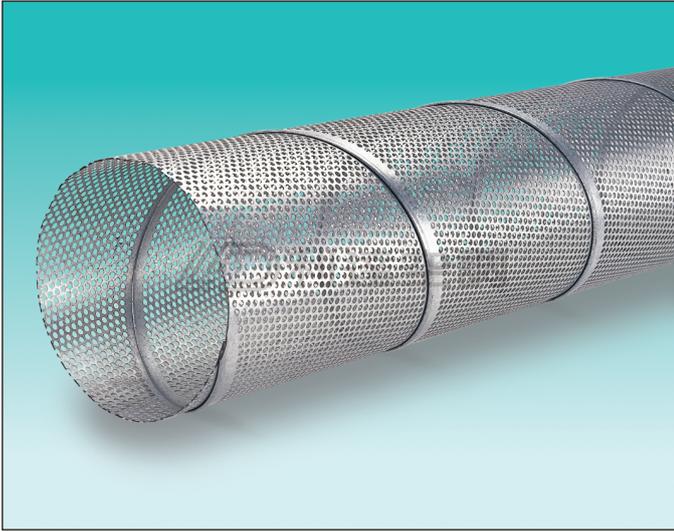

規格表


管徑 mm φD	長度 m L	厚度 t (mm)				節距 mm P
		0.5	0.6	0.8	1.0	
75	3	●				127
100	3	●				127
125	3	●				127
150	3	●				127 280
175	3	●				127 280
200	3	●				127 280
225	3	●				127 280
250	3	●				127 280
275	3	●				127 280
300	3	●	○			127 280
325	3		●			127 280
350	3		●			127 280
375	3		●			127 280
400	3		●			127 280
425	3		●			127 280
450	3		●			127 280
475	3		●	○		127 280
500	3		●	○		127 280
550	3		●	○	○	127 280
600	3		●	○	○	127 280
650	3		●	○	○	127 280
700	3		●	○	○	127 280
750	3		●	○	○	127 280
800	3		●	○	○	127 280
850	3			●	○	127 280
900	3			●	○	127 280
950	3			●	○	127 280
1000	3			●	○	127 280
1100	3				●	127 280
1200	3				●	127 280
1300	3				●	127 280
1400	3				●	127 280
1500	3				●	127 280
1600	3				●	127 280

產品說明

- 材質可選用鍍鋅鋼板(G)、不鏽鋼板(S)、烤漆鋼板(C)。
- 螺紋網管管徑由75 mm起，配合外管口徑製作，保溫材料使用2"時，外管口徑需增加100 mm；保溫材料使用1"時，外管口徑需增加50 mm。
- 適合用於雙層螺紋管的內襯管及消音管內襯管使用。

型號 SDP * - t - D
 材質 (G、S、C)
 板厚 (mm) t
 口徑 (mm) D

尺寸圖

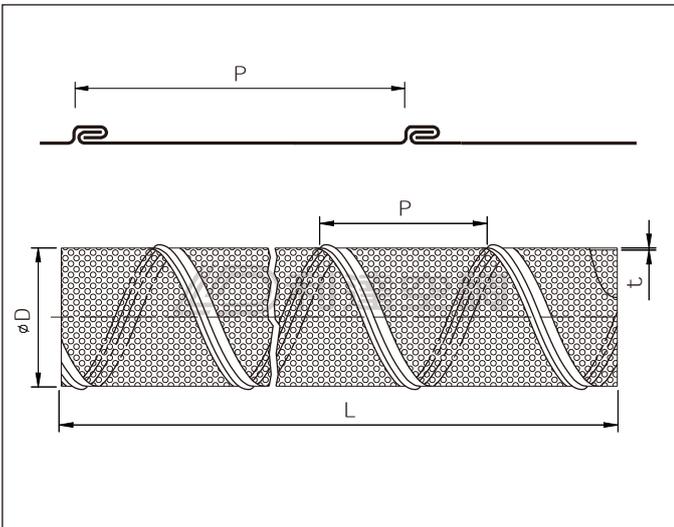

附註：● 為建議厚度，規格以外尺寸亦可訂做。